

# Condulet CPS conduit outlet boxes with covers

Cl. I, Div. 1 & 2, Groups C, D  
Cl. II, Div. 1, Groups E, F, G  
Cl. II, Div. 2, Groups F, G  
Cl. III

Explosionproof  
Dust-ignitionproof

3F

## Applications:

CPS conduit outlet boxes are installed in conduit systems in hazardous areas to:

- Protect conductors in threaded rigid conduit
- Act as pull and splice boxes
- Change conduit direction
- Interconnect lengths of conduit
- Act as luminaire hangers with hub covers
- Provide access to conductors for maintenance and future system changes

## Features:

CPS conduit outlet boxes have:

- Two types of cover:
  - Blank for splice or pull box use
  - Threaded hub for mounting luminaires
- Wide, accurately machined body and cover mating surfaces, to ensure flamtight joint
- Blind tapped holes for cover screws to further ensure flamtightness
- Removable mounting feet for flush or surface mounting to wall or ceiling

## Certifications and compliances:

### NEC/CEC:

- Class I, Divisions 1 & 2, Groups C, D
- Class II, Division 1, Groups E, F, G
- Class II, Division 2, Groups F, G
- Class III

### UL standard:

- UL1203

### CSA standard:

- C22.2 No. 30

## Standard material:

- Feraloy iron alloy

## Standard finish:

- Electrogalvanized and aluminum acrylic paint

## Options:

Description	Suffix
• Corro-free epoxy enamel.....	S752

Cl. I, Div. 1 & 2, Groups C, D  
Cl. II, Div. 1, Groups E, F, G  
Cl. II, Div. 2, Groups F, G  
Cl. III

Explosionproof  
Dust-ignitionproof

## Ordering information:

### Box with hub cover



Body hub size	Cover	Cat. #
1/2" and 3/4"	1/2"	CPS12021
1/2" and 3/4"	3/4"	CPS12022

### Box with blank cover



Hub size	Cat. #
1/2" and 3/4"	CPS12026

### Body




Hub size	Cat. #
1/2" and 3/4"	CPS12

### Hub covers



Hub size	Cat. #
1/2"	CPS021
3/4"	CPS022

## Dimensions (in inches):

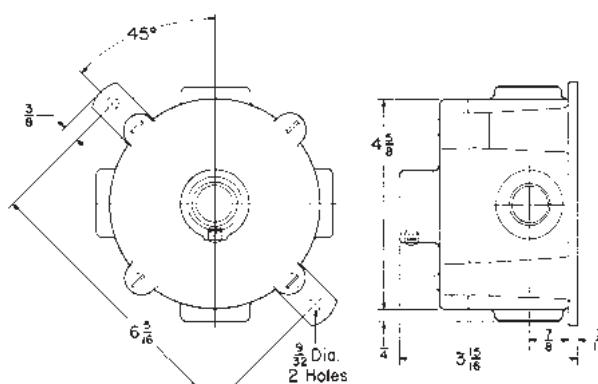

<sup>A</sup>Furnished with four 3/4" standard taper tapped, integrally bushed hubs. Each hub as a 3/4" to 1/2" reducer. Three hubs are plugged. See Section 6F for complete line of fixture hangers.