

ProJBX JUSN/wd

**FEATURES**

- Non-metallic junction box.
- High temperature silicone gasket provides a watertight seal.
- Two heavy duty mounting pads.
- Internal grounding lug with cup washer for stranded wiring.
- Four threaded entries with removable knockouts.
- Silicone gasket provides a watertight seal.

APPLICATIONS

- Watertight & corrosive requirements
- Pharmaceutical & additives formulation & processing
- Waste water treatment plants
- Pulp & paper production
- Food & beverage processing facilities

APPROVALS

- Conforms to IP66
- ABS

TECHNICAL SPECIFICATIONS**BOX/COVER**

Reinforced polyethylene terephthalate (PET).

HARDWARE

Stainless steel.

GASKET

One piece silicone.


ENTRIES

Four $\frac{3}{4}$ " NPT threaded entries with knockouts.

MOUNTING

Surface via two maximum $\frac{1}{4}$ " mounting bolts (not included).



ORDERING REFERENCES

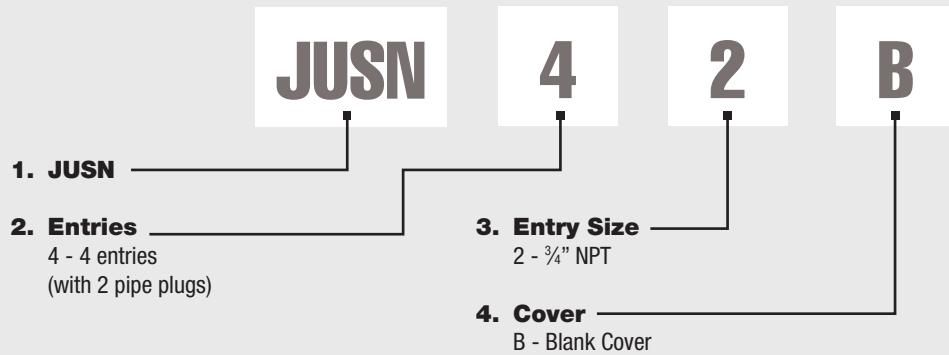

SPARE PARTS

Part No.	Description	Lbs	Kg
JUS-NBC	Blank Cover	0.50	0.23
JUS-G	Gasket	0.10	0.05

DIMENSIONS

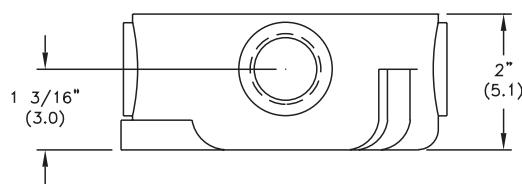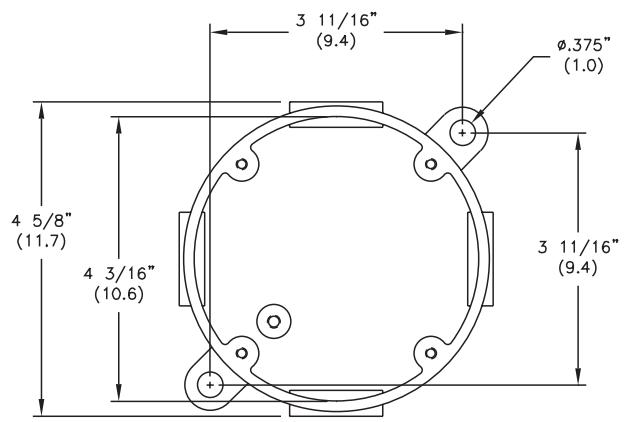

Dimensions in inches (cm)