

Harsh/heavy industrial LED lighting
Champ® Pro PFMA LED floodlights

CROUSE-HINDS
SERIES

Champ® Pro PFMA

High lumen LED floodlights



Powering Business Worldwide



Champ PFMA LED floodlights

Safe. Reliable. Efficient.

Featuring the industry's broadest range of LED luminaires for harsh, hazardous and industrial environments, Eaton's Crouse-Hinds can deliver a lighting solution that performs reliably in even the worst operating conditions. All the while reducing your energy, maintenance and manpower costs.

Why LED?

Energy efficiency

LED average energy consumption is significantly less than traditional fluorescent and HID fixtures

Start/restart time

Instant illumination vs. 10 minute restrike time for HID

Light quality

Higher color rendering compared to fluorescent and HID

Environmental benefits

Mercury-free LED eliminates disposal costs and lower energy consumption for a smaller carbon footprint

Why Crouse-Hinds?

Industry-best reliability

Built to withstand a wide array of applications

Thermal management

Effective heat sinking ensures longer life

Quality of light

Custom optics designed to maximize light distribution and intensity

Globally certified

Designed to global specifications for IEC and NEC applications

Serviceable drivers

Easy access to drivers for service or replacement

Design features



PFMA20L & 25L

Smaller and lighter

- 25% smaller footprint than previous model
- 20 lbs. less weight than previous model



PFMA40L & 50L



Rugged heat sink

- Heat sink designed to perform and provide maximum light levels in high ambient temperatures up to +55°C and as low as -40°C
- Thick walled castings make for a tough, rugged housing that keeps the internal driver and LED temperature down

Versatile design

- Can be used for outdoor or indoor applications, and for a wide range of mounting heights depending on model and light level requirement

High lumen output:

- Up to 120 lumens per watt
- Up to 78% energy savings over traditional HID fixtures (compared to 400W MH)

Multiple lens options:


- Tempered clear glass lens standard
- Diffused glass lens optional




Why choose Champ PFMA floodlights?

Reliable floodlights. PFMA LED luminaires are engineered to deliver high lumen output and maintenance-free long life in the toughest conditions.


PFMA25L vs. 1000 watt HID



78%
ENERGY
EFFICIENCY



77%
TOTAL COST
OF OWNERSHIP



100%
MAINTENANCE
REDUCTION

Assumptions: Calculations based on overall life of the LED system. Energy cost of \$.09 per kilowatt; 24 hour per day operation; labor rate of \$75 each for 2 workers; average time for fixture maintenance of 1 hour.

Features & specifications

39% lighter than the previous design with a small footprint

Champ Pro PFMA high lumen LED floodlights are designed to provide full-spectrum, crisp, white light. Four versions of the PFMA are available, providing ideal solutions for a wide range of applications.

Model	Nominal lumens	Wattage*	Equivalent MH luminaire	Typical energy savings/lifetime
PFMA20L	20,500	177	600W-750W	Up to 78% reduction in energy costs and 120,000 hours of continuous operation!
PFMA25L	25,500	217	750W-1000W	
PFMA40L	40,500	340		1500W +
PFMA50L	50,500	400		

*UNV1 at 120 VAC.

Applications:

- Locations requiring continuous and consistent light levels in extreme ambient temperatures
- Areas requiring frequent on-and-off of lights
- Where extremely corrosive, wet, dusty, hot and/or cold conditions exist
- Manufacturing plants; heavy industrial, chemical, food and beverage facilities; mining; platforms; loading docks; tunnels; outdoor wall and pole mounted areas

Design features:

- Rugged design – engineered to perform in ambient temperatures from -40°C to 55°C
- High efficiency – engineered to deliver 117 lumens per watt
- Full frame yoke – designed to utilize the SFA6 slipfitter and SWB6 wall mount bracket, making it ideal for retrofit or new installations
- Custom optics – standard 7x6 pattern provides maximum light distribution
- 5 year fixture warranty†

*SFA6 slipfitter and SWB6 wall mount bracket sold separately (20L/25L only).

†Refer to page 2 of the authorized distributor price book for Crouse-Hinds standard Terms and Conditions.

Fixture life:

- Rated life of 60,000 hours at 55°C operating ambient and 24/7 continuous operation for 365 days

Standard materials:

- Lamp housing and adapter – die cast aluminum with Corro-free™ epoxy powder coat
- Lens – heat- and impact-resistant glass (standard)
- Gaskets – silicone and neoprene
- External hardware – stainless steel

Electrical ratings – NEC model:

Model	120-277 VAC at 50/60 Hz		347-480 VAC at 50/60 Hz	
	Input power	Input amps	Input power	Input amps
PFMA20L	177W	1.76A	177W	0.52A
PFMA25L	217W	2.18A	216W	0.63A
PFMA40L	340W	3.35A	338W	1.24A
PFMA50L	400	4.14A	400W	1.54A

All models	
Power factor	>0.90




Certifications and compliances – NEC model:

NEC and CEC:

- Type 4X, IP66

UL Standards:

- UL1598; UL1598A; cUL

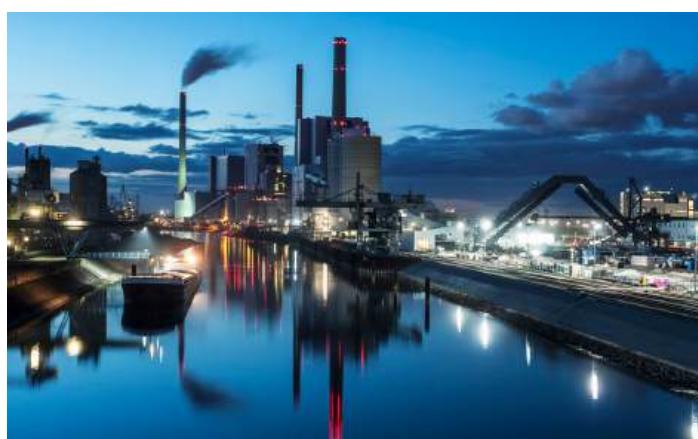


Ordering information

Part number example


PFMA20LCY/UNV34 76 M20 S891 BZ

Champ Pro PFMA floodlight, 20,500 lumens, cool white, yoke mount, 347-480 VAC driver, 20mm entry, diffused glass lens, bronze paint

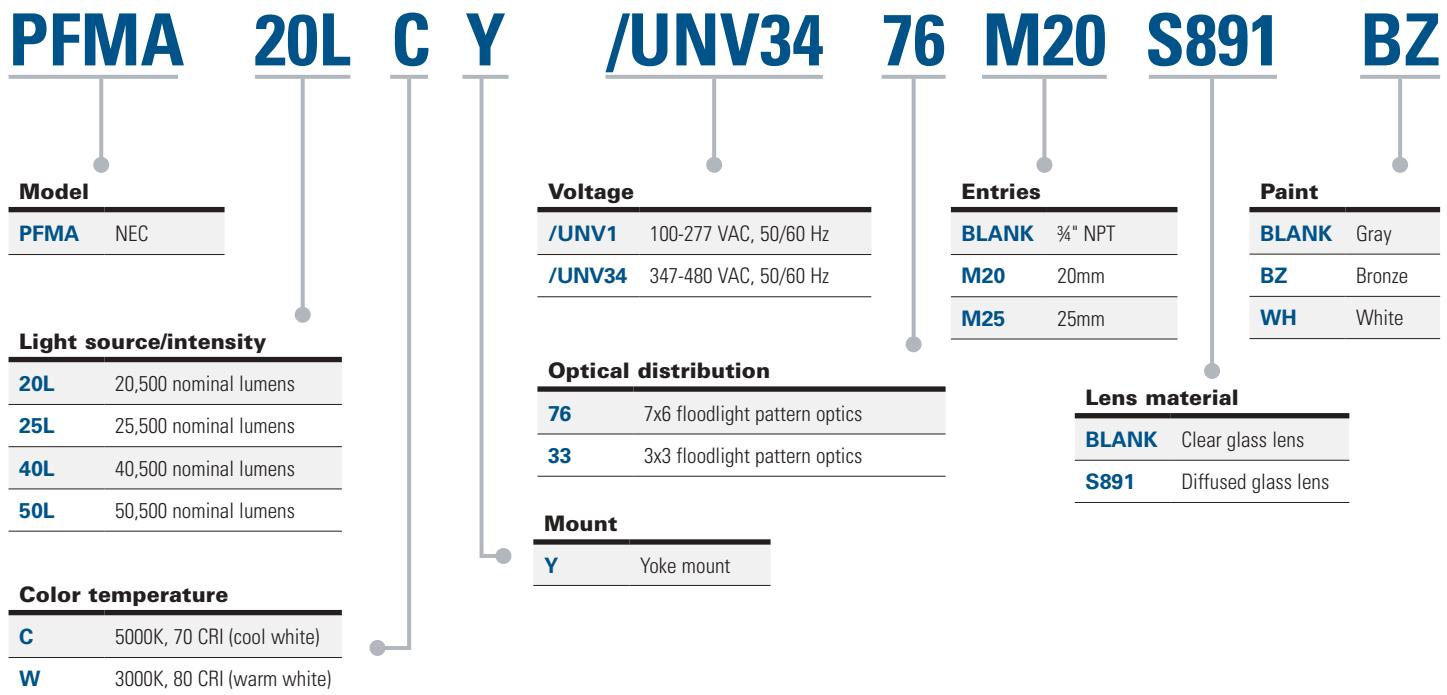

Accessories (ordered separately)

BLHN2	Bull horn, 2 tenon, gray	BLHN3	Bull horn, 3 tenon, gray	DSV2	Bolt-on visor	SFA6*	Slipfitter
BLHN-BZ2	Bull horn, 2 tenon, bronze	BLHN-BZ3	Bull horn, 3 tenon, bronze	P62	Bolt-on wire guard	SWB6*	Slipfitter wall mount
BLHN-WH2	Bull horn, 2 tenon, white	BLHN-WH3	Bull horn, 3 tenon, white	SC831	Safety cable	*20L and 25L models only.	

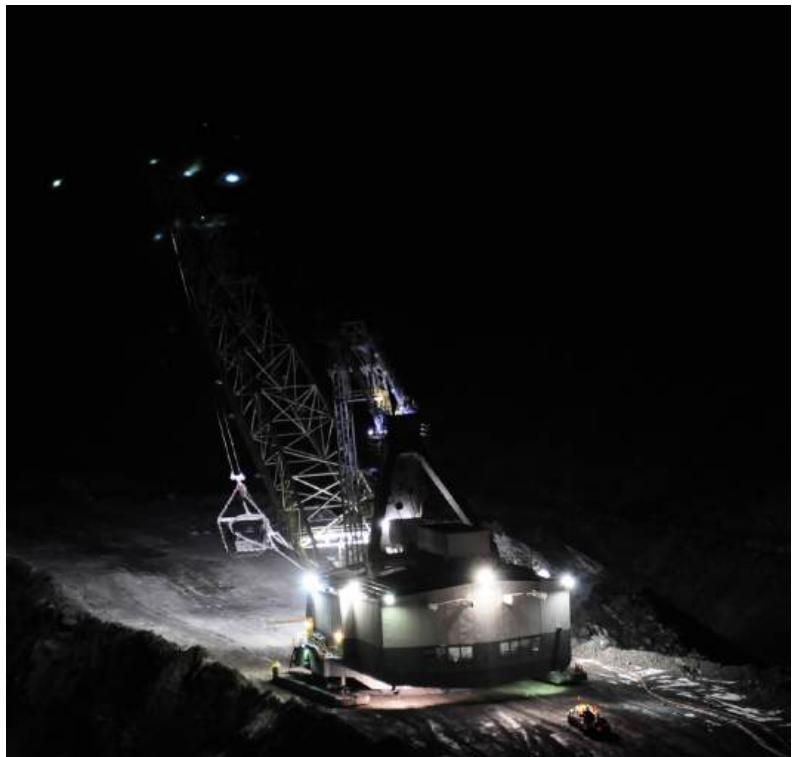





Weights and dimensions

PFMA20 & 25L

	Width		Height		Depth		Weight	
	in.	mm.	in.	mm.	in.	mm.	lb.	kg.
PFMA20L & 25L	15.5	393.7	12.0	304.8	7.0	177.8	34.0	15.4

Effective projected area 20L & 25L

Position (tilt)	ft.-sq.
at 0°	1.5
at 45° backwards	1.1
at 60° forward	0.8

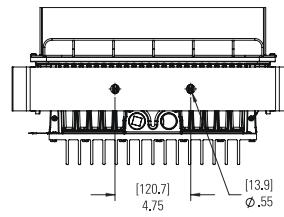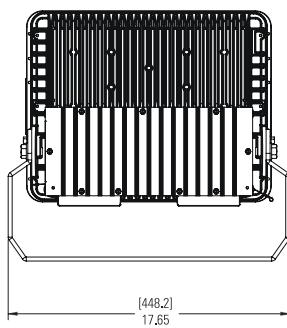
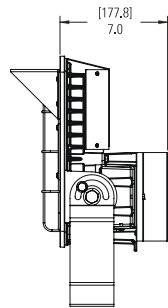
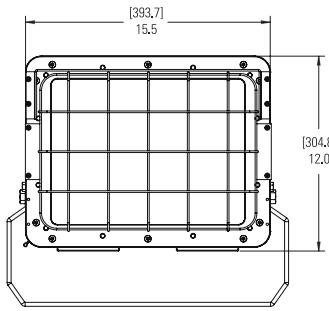


PFMA40L & 50L

	Width		Height		Depth		Weight	
	in.	mm.	in.	mm.	in.	mm.	lb.	kg.
PFMA40L & 50L	18.0	457.2	24.0	609.6	17.28	438.8	77.0	34.9

Effective projected area 40L & 50L


Position (tilt)	ft.-sq.
at 0°	3.20
at 45° backwards	3.25
at 60° forward	3.62

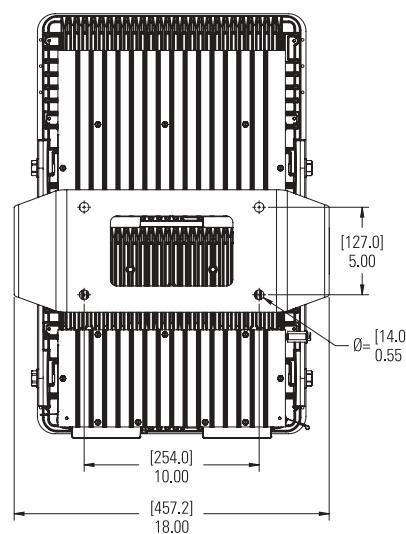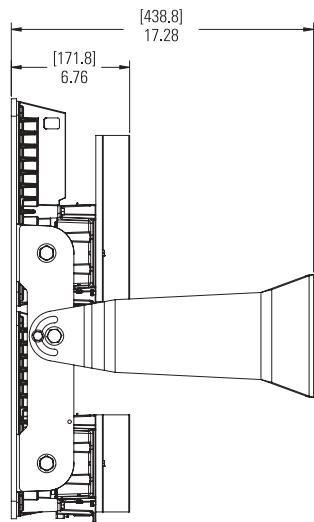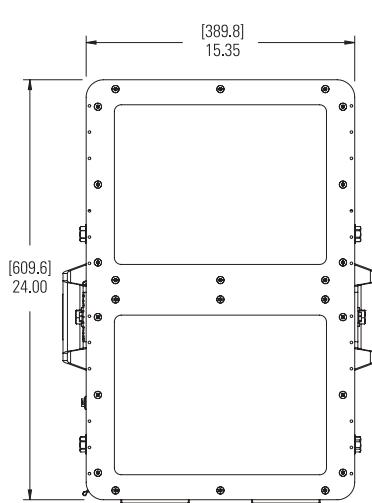

Photometric data


7x6 optics

PFMA20L Height: 45 ft.; Tilt angle: 45°

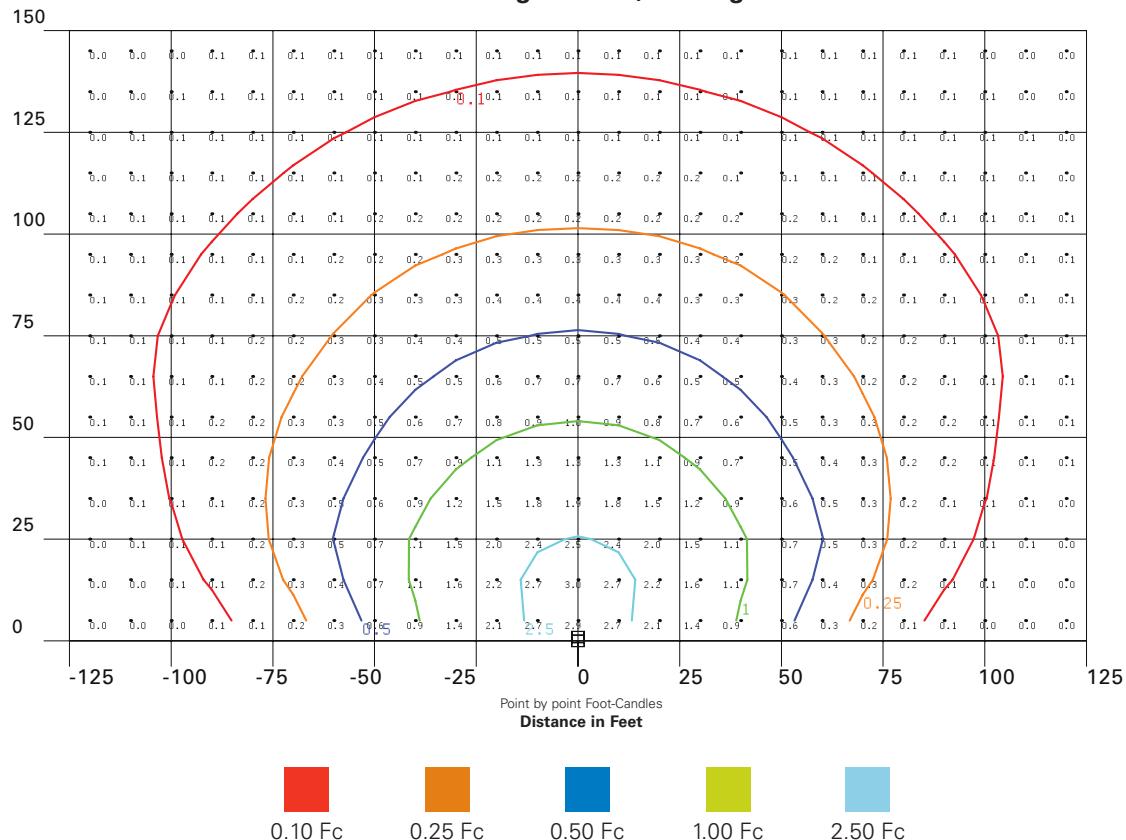

7x6 optics

PFMA25L Height: 45 ft.; Tilt angle: 45°

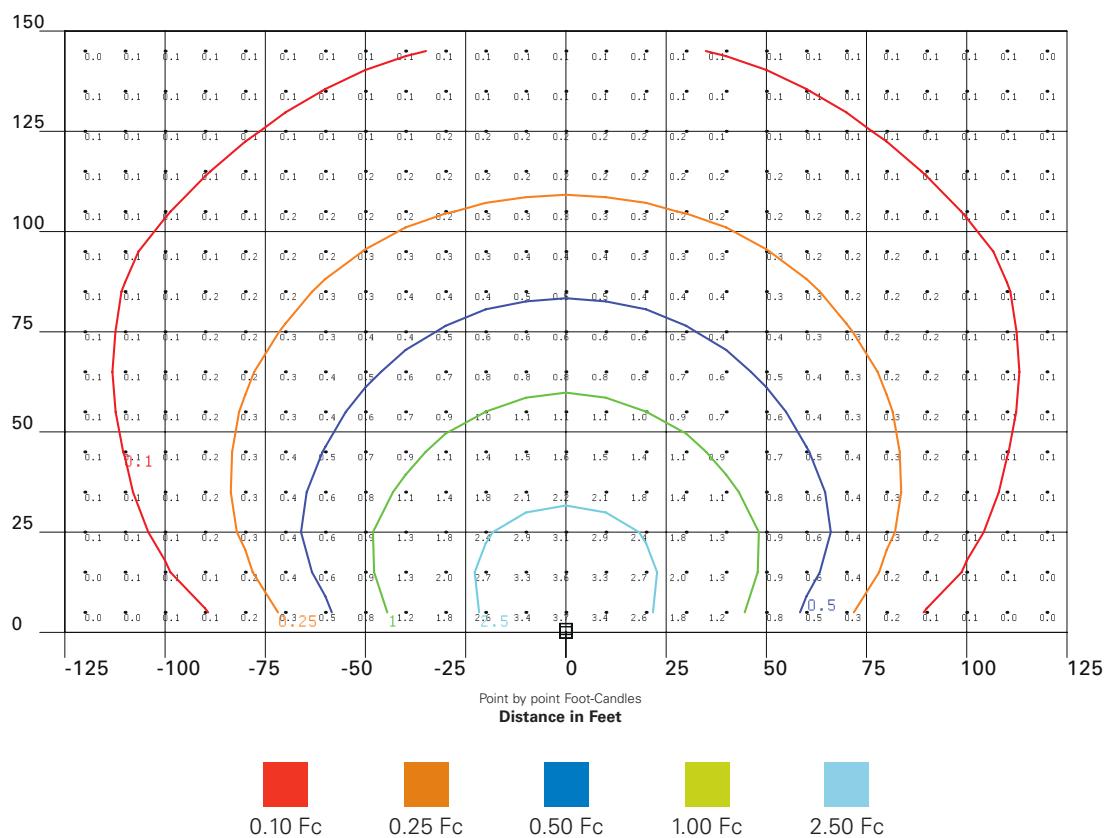

U.S. (global headquarters):
Eaton's Crouse-Hinds Division

1201 Wolf Street
Syracuse, NY 13208

(866) 764-5454
FAX: (315) 477-5179
FAX Orders Only:
(866) 653-0640

crousecustomerctr@eaton.com

For more information:
If further assistance is required, please contact an authorized Eaton Distributor, Sales Office, or Customer Service Department.

Canada

Toll Free: 800-265-0502
FAX: (800) 263-9504
FAX Orders only: (866) 653-0645

Middle East

971 4 8066100
FAX: 971 4 8894813
chmesales@eaton.com

Korea

82 2 6380 4032
82-2-6380-4070
ECHKsales@eaton.com

Mexico/Latin America/Caribbean

52-555-804-4000
FAX: 52-555-804-4020
ventascentromex@eaton.com

Singapore

65-6645-9888
FAX: 65-6297-4819
chsi-sales@eaton.com

Australia

1300-332-866
FAX: 61-2-9693-5127
crousehindsanz@eaton.com

Europe (Germany)

49 (0) 6271 806-500
49 (0) 6271 806-476
info-ex@eaton.com

China

86-21-2899-3600
FAX: 86-21-2899-4055
echsales@eaton.com

India

91-124-4683888
FAX: 91-124-4683899
cchindia@eaton.com

Eaton's Crouse-Hinds
1201 Wolf Street
Syracuse, NY 13208
Crouse-Hinds.com

Eaton
10000 Eaton Boulevard
Cleveland, OH 44122
United States
Eaton.com

© 2023 Eaton
All Rights Reserved
Printed in USA
Publication No. 5416-0923
September 2023

Eaton is a registered trademark.

All other trademarks are property
of their respective owners.