

Hazardous area cable glands
Terminator™ II TMCX

CROUSE-HINDS
SERIES

Terminator II TMCX cable glands

For use with metal-clad, TECK, unarmoured and tray cable



EAT•N

Powering Business Worldwide

A photograph of an industrial facility, likely a refinery or chemical plant. The scene features several large, cylindrical storage tanks and a complex network of pipes and scaffolding. A prominent white pipe runs horizontally across the middle of the frame. In the foreground, there's a large orange tarp. The sky is clear and blue.

Terminator™ II TMCX

barrier glands for terminating cable
in hazardous locations



Easy to prepare and install

Full range of sizes
for any application



The Terminator™ II TMCX Cable Gland is an armoured barrier, non-armoured barrier and TECK armoured gland used to terminate cable in hazardous locations. Its unique design features, coupled with our new fast curing Chico® LiquidSeal compound, make the Terminator™ II TMCX Cable Gland the easiest and safest solution available.

Cable types:

- Metal-clad and TECK (interlocked and continuously welded corrugated armoured) cable
- Non-armoured and tray cable
- Class I, Division 1 – MC-HL, TC-ER-HL, ITC-HL with LSC or TSC compound
- Class I, Division 2 – MC, MC-HL, TC, TC-ER-HL, PLTC, PLTC-ER, ITC, ITC-ER, ITC-HL with LSC or TSC compound




Certifications and compliances:

- Class I, Division 1, Groups A, B, C, D
- Class II, Groups E, F, G
- Class III
- Class I, Zone 1, Group IIC
- NEMA 4X - ½" to 4" (TMCX050 0 to TMCX400 2)
- NEMA 6P - ½" to 1¼" (TMCX050 0 to TMCX125 1)
- UL/cULus Listed - File No. E122485

Features and benefits:

- Designed to minimize the opportunity for incorrect assembly
- Simple selection process and field preparation aids to ensure the right gland is selected every time
- Full coverage of all popular cables and hub sizes, ensuring a perfect seal in all instances
- Use of nickel-plated brass and stainless steel to increase corrosion resistance and maintain integrity in the harshest environments
- Chico® LiquidSeal, an innovative liquid compound with fast gel and cure times, reduces waiting times
- Complete with integral dam to facilitate liquid pour
- Integral union design reduces the number of times the gland has to be assembled and disassembled during installation
- Mating components have generous lead-ins to ensure that assembly is as trouble-free as possible, even with the heaviest cables
- Use of neoprene seal allows use in temperatures from -40°C to +60°C; for specific temperature information, please contact your local sales representative
- Metric size threads allow interfacing to European machinery

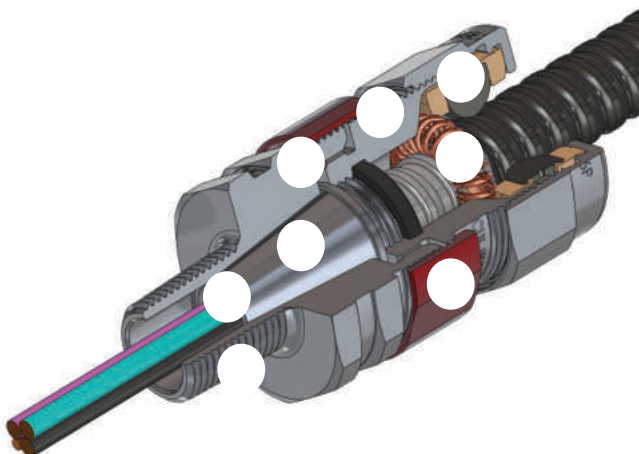

Design features:

- Ⓐ Captive sealing and back nut – the use of retaining rings with snap-in features enables the TMCX to retain all of the components in the entry end of the gland.
- Ⓑ Integral union – the design allows for a two-piece assembly gland, minimizing tightening and loosening of nuts.
- Ⓒ Red anodized nut – this hard-wearing, permanent, consistent coating is standard on all units.
- Ⓓ Anti-rotation feature – for single tool assembly; the splined shaft ensures that the two assemblies lock together and do not rotate during assembly.
- Ⓔ Barrier compounds – Chico® LiquidSeal or standard TSC epoxy compound options allow for rapid curing and assembly in any orientation.
- Ⓕ Conical compound chamber – ensures that double the misalignment can be accepted without the risk of binding.
- Ⓖ Captive garter spring – copper flashed stainless steel ensures good connectivity, strength and corrosion resistance.
- Ⓗ NPT and ISO threads – entire range of cable glands are available with either NPT or metric threads in all materials.


Selection table:

Entry thread 'C'	NPT catalog no.	Entry thread 'C' (metric option)	Metric catalog no.	Over cond. O.D. max. inches† 'G'	'A' armour O.D.		'B' cable O.D.†		Across corners 'D'	Thread length NPT 'E' (metric mm.)	Length 'F'
					Min.	Max.	Min.	Max.			
½"		M20		0.480	0.36 (9.14)	0.66 (16.76)	0.45 (11.43) ‡	0.70 (17.78)	1.44 (36.51)	0.89 (22.61)	2.93 (74.42)
½"	TMCX050 1	M20	TMCXM20 1	0.480	0.40 (10.16)	0.86 (21.84)	0.49 (12.45)	0.90 (22.86)	1.75 (44.45)	1.00 (25.40)	3.05 (77.47)
½"		M20		0.480	0.56 (14.22)	1.14 (28.96)	0.65 (16.51)	1.18 (29.97)	2.25 (57.15)	1.00 (25.40)	3.18 (80.77)
¾"	TMCX075 0	M25	TMCXM25 0	0.713	0.36 (9.14)	0.66 (16.76)	0.45 (11.43) ‡	0.70 (17.78)	1.63 (41.28)	0.90 (22.86)	2.93 (74.42)
¾"		M25		0.713	0.40 (10.16)	0.86 (21.84)	0.49 (12.45)	0.90 (22.86)	1.75 (44.45)	1.00 (25.40)	3.05 (77.47)
¾"	TMCX075 2	M25	TMCXM25 2	0.713	0.56 (14.22)	1.14 (28.96)	0.65 (16.51)	1.18 (29.97)	2.25 (57.15)	1.00 (25.40)	3.18 (80.77)
1"		M32		0.713	0.40 (10.16)	0.86 (21.84)	0.49 (12.45) ‡	0.90 (22.86)	1.75 (44.45)	1.08 (27.40)	3.13 (79.50)
1"	TMCX100 1	M32	TMCXM32 1	0.939	0.56 (14.22)	1.14 (28.96)	0.65 (16.51)	1.18 (29.97)	2.25 (57.15)	1.08 (27.40)	3.18 (80.77)
1"		M32		0.939	0.78 (19.81)	1.35 (34.29)	0.87 (22.10)	1.39 (35.31)	2.56 (65.02)	1.08 (27.40)	3.30 (83.82)
1-¼"	TMCX125 1	M40	TMCXM40 1	1.172	0.78 (19.81)	1.35 (34.29)	0.87 (22.10)	1.39 (35.31)	2.56 (65.02)	1.08 (27.40)	3.30 (83.82)
1-¼"		M40		1.150	0.94 (23.87)	1.67 (42.41)	1.03 (26.16)	1.65 (41.91)	3.73 (94.74)	1.25 (31.75)	4.71 (119.63)
1-½"	TMCX150 1	M50	TMCXM50 1	1.370	0.94 (23.87)	1.67 (42.41)	1.03 (26.16)	1.65 (41.91)	3.73 (94.74)	1.25 (31.75)	4.71 (119.63)
1-½"		M50		1.370	1.28 (32.51)	1.97 (50.03)	1.53 (38.86)	2.07 (52.58)	4.11 (104.39)	1.25 (31.75)	4.71 (119.63)
2"	TMCX200 1	M63	TMCXM63 1	1.760	1.28 (32.51)	1.97 (50.03)	1.53 (38.86)	2.07 (52.58)	4.11 (104.39)	1.25 (31.75)	4.71 (119.63)
2"		M63		1.760	1.67 (42.41)	2.62 (66.54)	1.81 (45.97)	2.72 (69.09)	4.98 (126.49)	1.25 (31.75)	5.63 (143.00)
2-½"	TMCX250 1	M75	TMCXM75 1	2.140	1.67 (42.41)	2.62 (66.54)	1.81 (45.97)	2.72 (69.09)	4.98 (126.49)	1.81 (45.97)	5.63 (143.00)
2-½"		M75		2.140	2.11 (53.59)	2.95 (74.93)	2.34 (59.44)	3.13 (79.50)	5.61 (142.49)	1.81 (45.97)	5.80 (147.32)
3"	TMCX300 1	M90	TMCXM90 1	2.690	2.11 (53.59)	2.95 (74.93)	2.34 (59.44)	3.13 (79.50)	5.61 (142.49)	1.81 (45.97)	5.80 (147.32)
3"		M90		2.690	2.45 (62.23)	3.39 (86.10)	2.68 (68.07)	3.61 (91.69)	6.23 (158.24)	1.81 (45.97)	6.26 (159.00)
3-½"	TMCX350 1	M110	TMCXM110 1	3.130	2.45 (62.23)	3.39 (86.10)	2.68 (68.07)	3.61 (91.69)	6.23 (158.24)	1.94 (49.28)	6.26 (159.00)
3-½"		M110		3.570	3.05 (77.47)	4.22 (107.18)	3.13 (79.50)	3.97 (100.84)	6.73 (170.94)	1.94 (49.28)	6.52 (165.61)
4"	TMCX400 1	-	-	3.130	2.45 (62.23)	3.39 (86.10)	2.68 (68.07)	3.61 (91.69)	6.23 (158.24)	2.00 (50.80)	6.26 (159.00)
4"		-		3.570	3.05 (77.47)	4.22 (107.18)	3.13 (79.50)	3.97 (100.84)	6.73 (170.94)	2.00 (50.80)	6.52 (165.61)


*All dimensions in inches; metric millimeters shown in parenthesis.

†When making your cable gland selection based on Cable O.D., be sure to also observe the Over Conductors O.D. dimension.

‡Minimum cable O.D for CSA certification is 0.49 (12.45) for TMCX050 0 & TMCX075 0; 0.57 (14.48) for TMCX100 0.

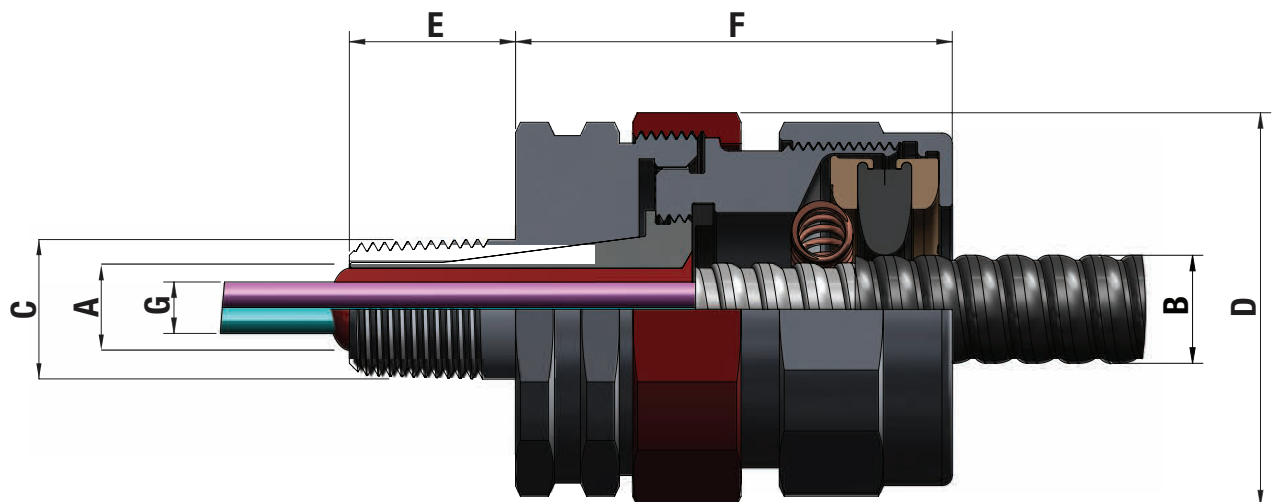

Catalog numbering system:

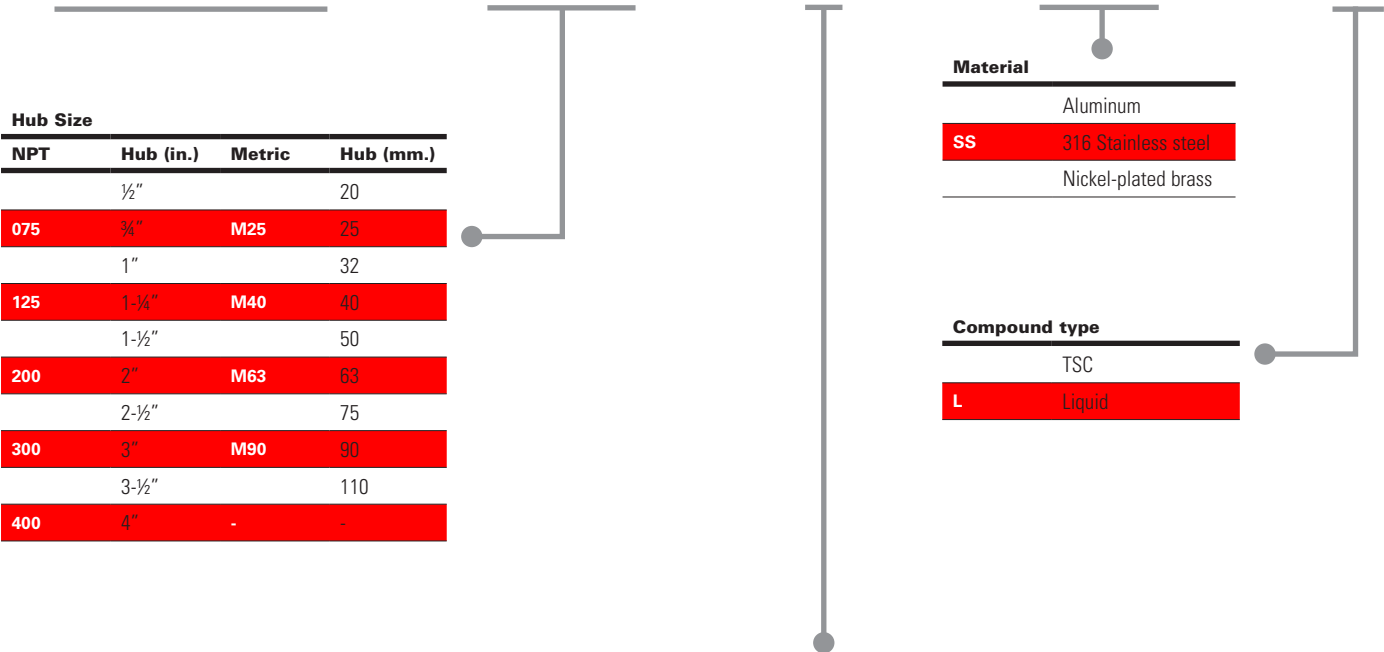

Cable sealing range									
Hub size code	Thread		Sealing range code	Standard cable sealing range	Hub size code	Thread		Sealing range code	Metric cable sealing range
050	½"	NPT		0.45" - 0.70"	M20	M20	ISO		11.4 mm - 17.8 mm
				0.49" - 0.90"					12.4 mm - 22.8 mm
				0.65" - 1.18"					16.5 mm - 29.9 mm
075	¾"	NPT	0	0.45" - 0.70"	M25	M25	ISO	0	11.4 mm - 17.8 mm
			1	0.49" - 0.90"				1	12.4 mm - 22.8 mm
			2	0.65" - 1.18"				2	16.5 mm - 29.9 mm
100	1"	NPT		0.49" - 0.90"	M32	M32	ISO		12.4 mm - 22.8 mm
				0.65" - 1.18"					16.5 mm - 29.9 mm
				0.87" - 1.39"					22.0 mm - 35.3 mm
125	1-¼"	NPT	1	0.87" - 1.39"	M40	M40	ISO	1	22.0 mm - 35.3 mm
			2	1.03" - 1.71"				2	26.1 mm - 43.4 mm
150	1-½"	NPT		1.03" - 1.71"	M50	M50	ISO		26.1 mm - 43.4 mm
				1.42" - 2.07"					36.0 mm - 52.7 mm
200	2"	NPT	1	1.42" - 2.07"	M63	M63	ISO	1	36.0 mm - 52.7 mm
			2	1.81" - 2.72"				2	45.9 mm - 69.0 mm
250	2-½"	NPT		1.81" - 2.72"	M75	M75	ISO		45.9 mm - 69.0 mm
				2.24" - 3.28"					56.8 mm - 83.3 mm
300	3"	NPT	1	2.24" - 3.28"	M90	M90	ISO	1	56.8 mm - 83.3 mm
			2	2.62" - 3.78"				2	66.5 mm - 96.0 mm
350	3-½"	NPT		2.62" - 3.78"	M110	M110	ISO		66.5 mm - 96.0 mm
				3.11" - 4.28"					78.9 mm - 108.7 mm
400	4"	NPT	1	2.62" - 3.78"					
			2	3.11" - 4.28"					

Chico® LiquidSeal

- Mixing time: 2 minutes
- Application: pour/gun
- Gel time: 15-30 minutes*
- Full cure/return to service time: 2 hours*
- Available for installation in vertical position
- Integral dam means no packing or taping to prevent liquid leakage

*At 20°C ambient temperature.



Catalog no.	Size (ml.)	Standard carton quantity
	10 ml.	10
LSC 20	20 ml.	10
	75 ml.	5

Chico® LiquidSeal 200 ml. cartridge

- Easily and quickly pour multiple glands
- Self-mixing nozzles
- Gel time: 15-30 minutes*
- Full cure/return to service time: 2 hours*
- Can be stored between uses
- ½" to 1-¼" in aluminum TMCX II now available bulk packed without compound
- Can be stored between uses

*At 20°C ambient temperature.



Applicator gun not included.

Catalog No.	Description	Standard carton quantity
	200 ml. liquid compound cartridge and three (3) mixing nozzles	1
LSCTIP	Replacement mixing nozzles	5

Bulk pack glands

Catalog no.	Description	Standard carton quantity
	½" cable glands without compound	20
TMCX075 0 BULK	¾" cable glands without compound	15
	1" cable glands without compound	15
TMCX050 1 BULK	½" cable glands without compound	20
	¾" cable glands without compound	15
TMCX100 1 BULK	1" cable glands without compound	10
	1-¼" cable glands without compound	10

TSC epoxy compound

- Mixing time: 5 minutes
- Application: by hand
- Full cure time: 24 hours
- Available for installation in any orientation



Catalog no.	Tube size (oz.)	Standard carton quantity
	0.5 oz.	10
TSC1	1.0 oz.	10
	4.0 oz.	5

