

# LED Down Light – CDLL

## Product Introduction

### Housing

Galvanized Steel, with RAL9016 white powder coated, optional SS316L

### Mounting

Recessed mounting, 150mm cut-out, thickness of ceiling less than 75mm

### Diffuser

IP44 sealed diffuser on trim ring

### Entries

Two Ø20.5 holes for cable glands

### Electric

Electronic ballast  
110~240V, 50/60Hz

### Terminal Block

3 pole 6mm<sup>2</sup> max

### Light Source

LED 10W 1400lm

### Ambient Temp

-30 °C~+45 °C




## Application Area

IP44, meeting room, entertaining room or other interior spaces

## Ordering Information

CDLL	-00	-10	-H
	00-Galvanized Steel	10-10W	Default-50mm ceiling
	16-Stainless Steel 316L	20-20W	H-75mm ceiling

## Dimensions

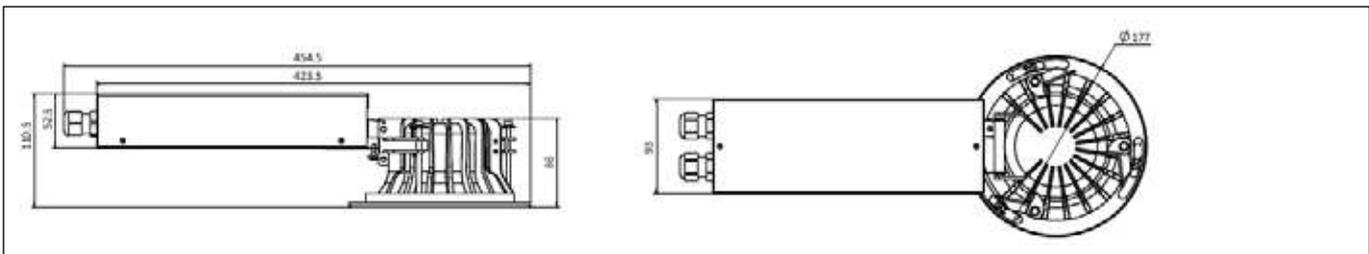

## Polar Curves

