

Berth LED Light – CMBL

Product Introduction

Housing

Galvanized Steel, with
RAL9016 white powder
coated, optional SS316L

Switch

Double pole switch and
receptacle provided

Diffuser

Acrylic

Electric

Electronic ballast
110~240V, 50/60Hz

Light Source

LED 6W 800lm

Application Area

IP22, berth light or desk
light

Mounting

Surface mounting

Entries

Two Ø5mm holes on back,
with rubber grommet

Terminal Block

3 pole 6mm² max

Ambient Temp


-30 °C~+45 °C



Ordering Information

CMBL	-00	-06	-NR
	00-Galvanized Steel 16-Stainless Steel 316L	06-6W	Blank-w/ socket NR-w/o socket

Dimensions

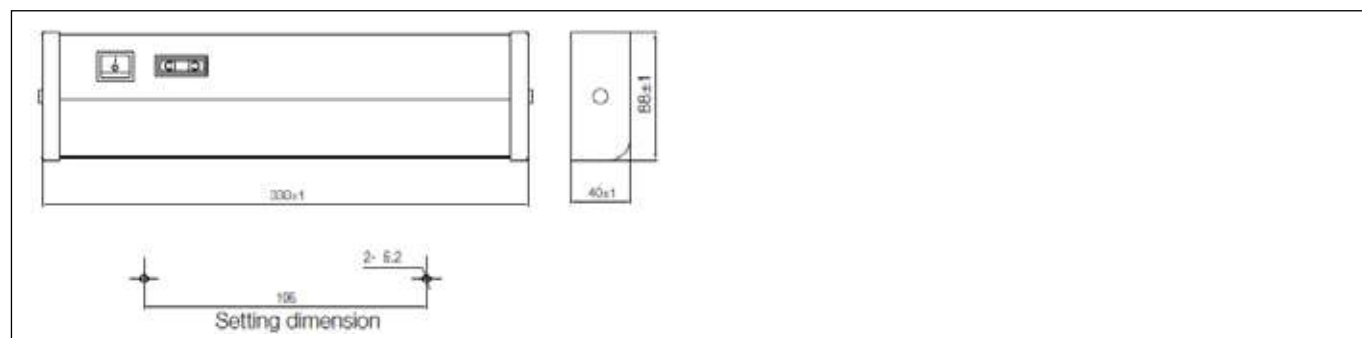

Polar Curves

