

Corner LED Luminaire – CMCL

Product Introduction

Housing

Galvanized Steel, with RAL9016 white powder coated, optional SS316L

Diffuser

PC

Electric

Electronic ballast
110~240V, 50/60Hz

Light Source

LED 10W 1400lm

Application Area

IP44, for passageway, stairwells

Mounting

Surface mounting

Entries

Two Ø16mm holes on back, with rubber grommet

Terminal Block

3 pole 6mm² max

Ambient Temp


-30 °C~+45 °C



Ordering Information

CMCL	-00	-10
	00-Galvanized Steel	10-10W
	16-Stainless Steel 316L	

Dimensions

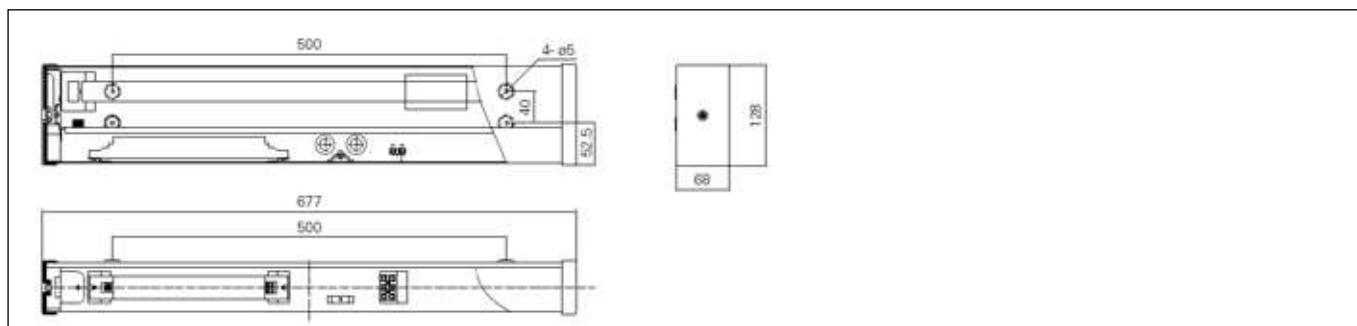

Polar Curves

