

Mirror LED Light – CMML

Product Introduction

Housing

Galvanized Steel, with
RAL9016 white powder
coated, optional SS316L

Switch

Double pole switch and
receptacle provided

Diffuser

PC

Electric

Electronic ballast
110~240V, 50/60Hz

Light Source

LED 6W 800lm

Application Area

IP44, for bathroom, mirror
or berth

Mounting

Surface mounting, under
cabinet

Entries

Two Ø15mm holes on
back, with rubber grommet

Terminal Block

3 pole 6mm² max

Ambient Temp


-30 °C~+45 °C



Ordering Information

CMML	-00	-06	-NR
	00-Galvanized Steel	06-6W	Blank-w/ socket
	16-Stainless Steel 316L		NR-w/o socket

Dimensions

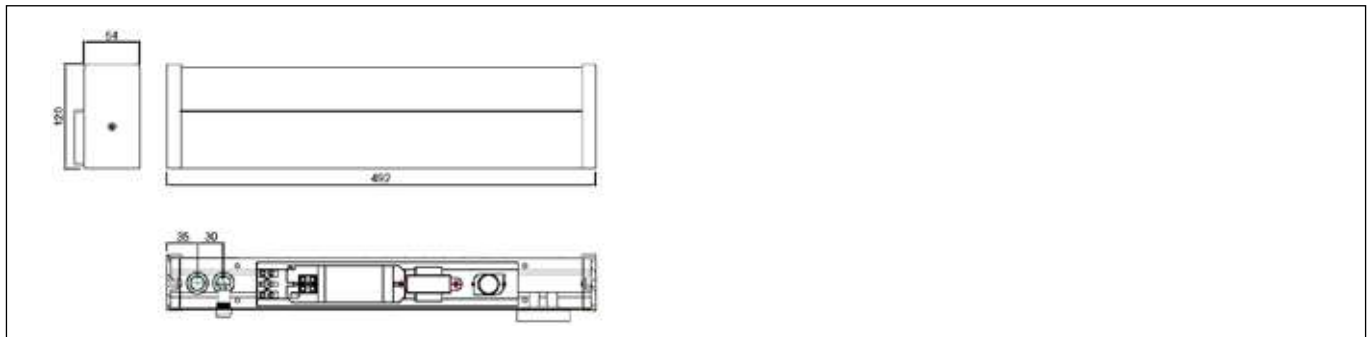

Polar Curves

