

Recessed LED Luminaire – CMRL

Product Introduction

Housing

Galvanized Steel, with RAL9016 white powder coated, optional SS316L

Application Area

IP42, for office, wheelhouse, stateroom, and etc.

Diffuser

Translucent white acrylic

Mounting

Recessed mounting

Electric

Electronic ballast
110~240V, 50/60Hz

Entries

Two or four entry holes on back, with rubber grommet

Light Source

LED 2x10W 2x1400lm
LED 2x20W 2x2800lm

Terminal Block

6 pole 6mm² max

Ambient Temp


-30 °C~+45 °C



Ordering Information


CMRL	-00	-210	-EM	-20
	00-Galvanized Steel	210-2x10W	EM-1.5hrs Backup Battery	20-Cable Entry Ø20.5
	16-Stainless Steel 316L	220-2x20W	EM3-3hrs Backup Battery	25-Cable Entry Ø25.5

Dimensions

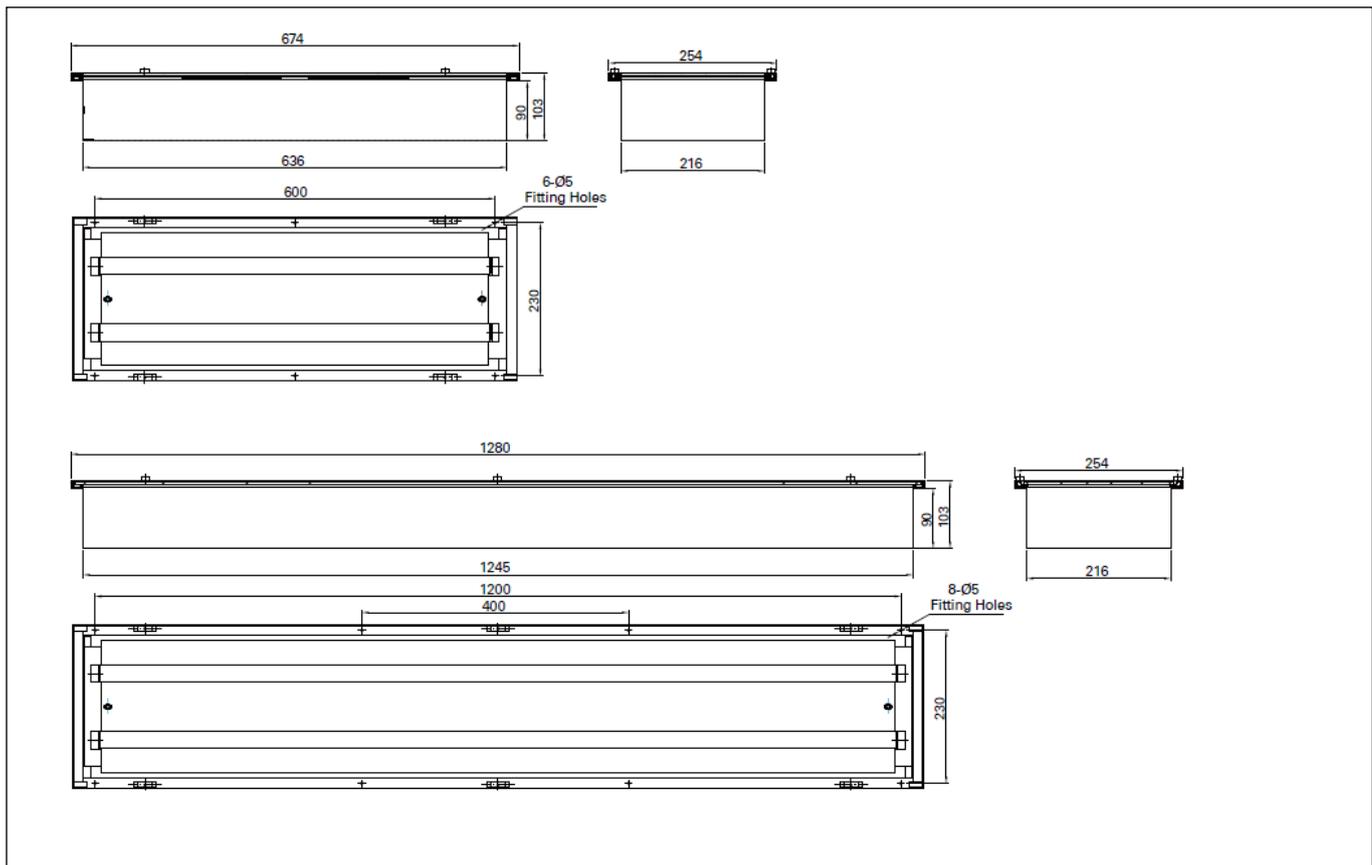

Recessed LED Luminaire – CMRL

Polar Curves

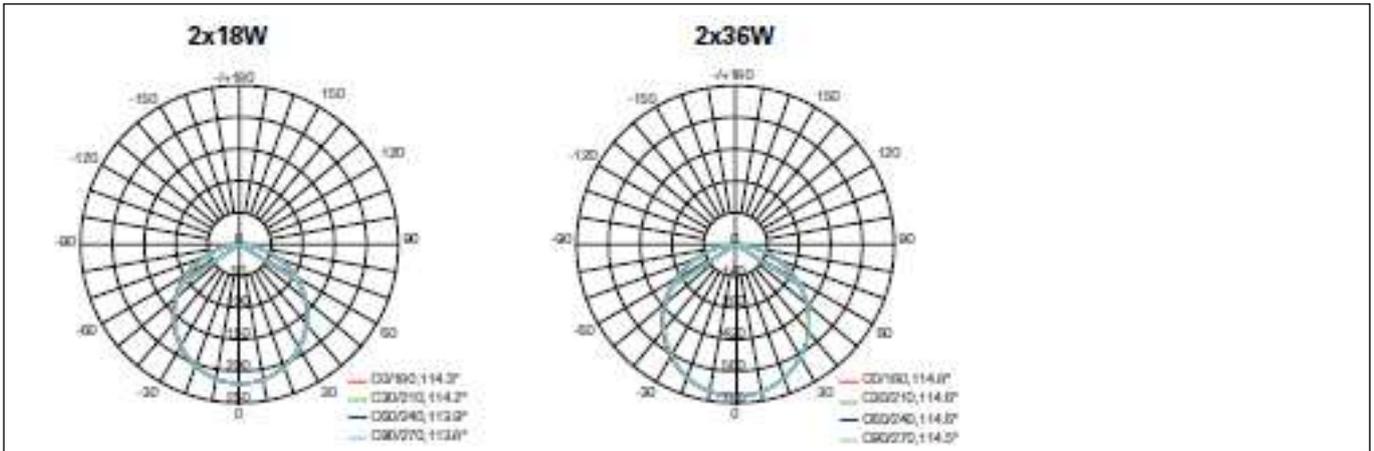

Recessed LED Luminaire – CMRL/C

Product Introduction

Housing

Galvanized Steel, with RAL9016 white powder coated, optional SS316L

Application Area

IP44, for office, wheelhouse, stateroom, and etc.

Diffuser

Translucent white acrylic

Mounting

Recessed mounting

Electric

Electronic ballast
110~240V, 50/60Hz

Entries

Two or four entry holes on back, with rubber grommet

Light Source

LED 2x10W 2x1400lm
LED 2x20W 2x2800lm

Terminal Block

6 pole 6mm² max

Ambient Temp


-30 °C~+45 °C



Ordering Information

CMRL/C	-00	-210	-EM	-20
	00-Galvanized Steel	210-2x10W	EM-1.5hrs Backup Battery	20-Cable Entry Ø20.5
	16-Stainless Steel 316L	220-2x20W	EM3-3hrs Backup Battery	25-Cable Entry Ø25.5

Dimensions

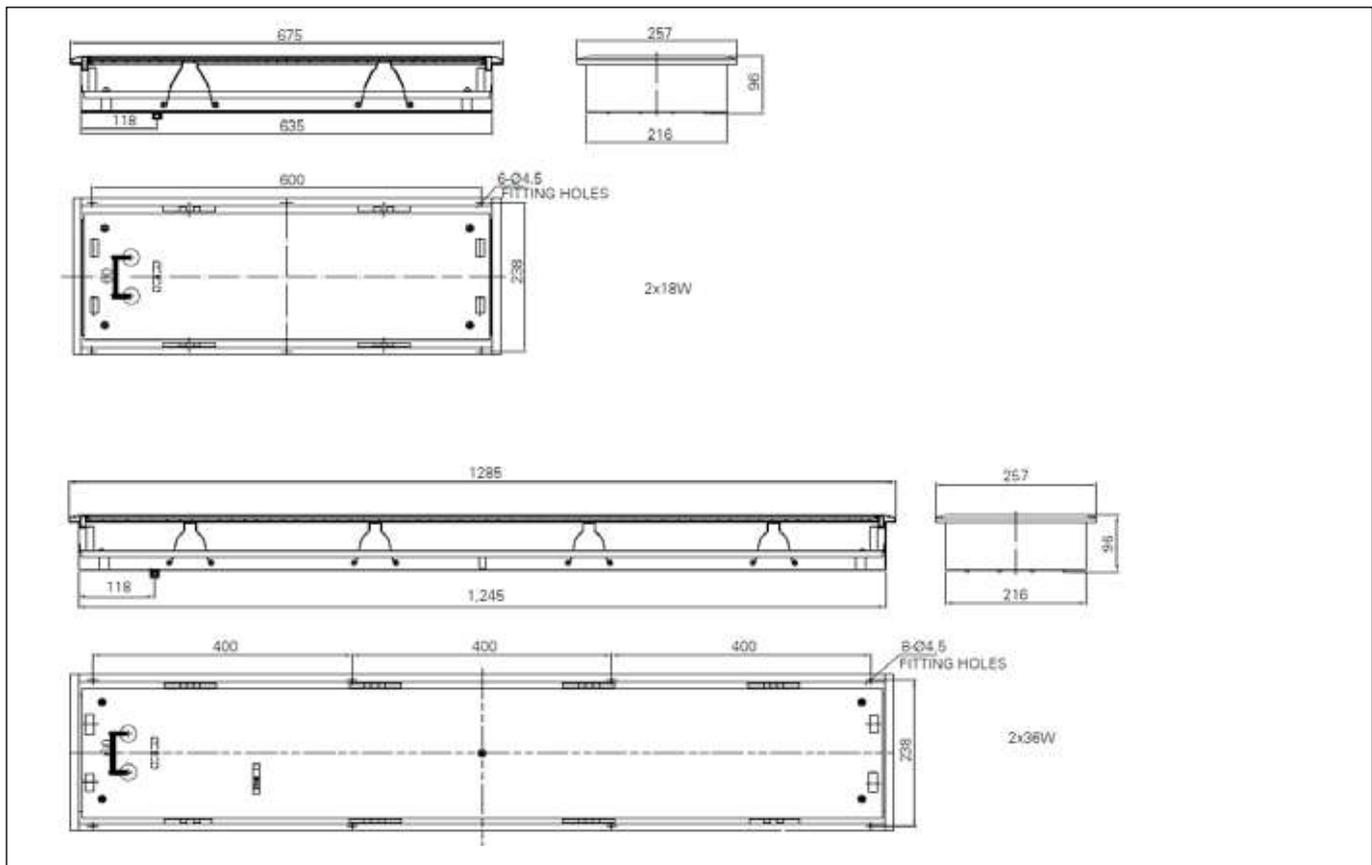

Recessed LED Luminaire – CMRL/C

Polar Curves

