

ECH-FDL02 LED flood light

Product introduction

Patented design combined with many advanced technologies, ECH-FDL02 can resist impact and corrosion with high strength Aluminum extruded housing.



Product features

- Perfect integrative heat sink insures good performance of LED lamp.
- Single or multiple LEDs module arrays your options, to provide more wattage as needed.
- LED modular design offers a simple maintenance.
- Multiple beam angles as your options, to suit your needs.
- Warranty: 5 years


Technical data

Compliance	CE
IP class	IP66
Ambient temperature	-40°C~45°C
Standard material	Aluminum extruded housing
Input voltage	AC100-277V, 50/60Hz
Cable entry	without cable gland, pre-wiring

Ordering logic

ECH-FDL02	-120W	-WT	-N
Product group	Power	Color temperature	Polar curve
ECH-FDL02	50W	WT=3000K, >90lm/W	N=15°
	60W	MT=4000K, >110lm/W	M=38°
	100W	CT=5700K, >110lm/W	W=60°
	120W		
	150W		
	180W		
	200W		
	240W		
	300W		
	360W		
	400W		
	480W		

Dimension

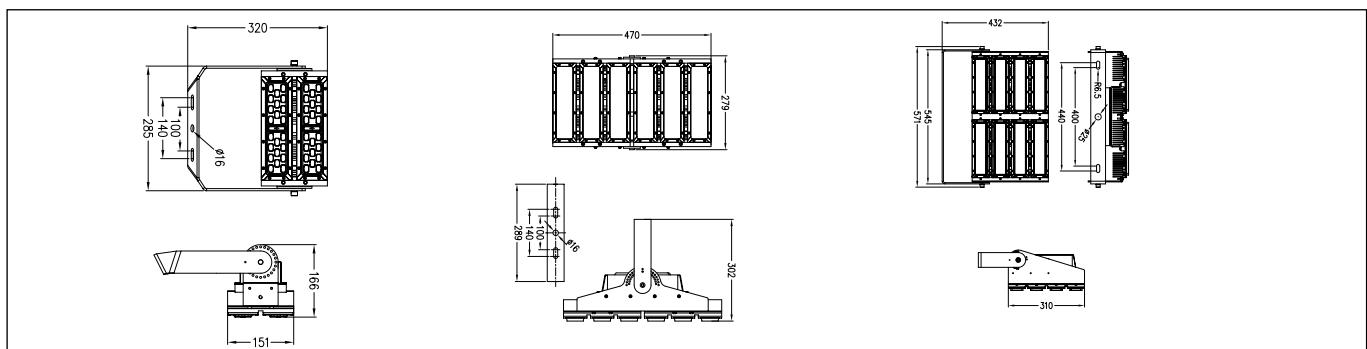

Polar curve

