

# ECH-FDL06 LED Flood Light

## Product introduction

ECH-FDL06 series LED flood light has LED modularization and plug-in technology, facilitate on-site maintenance.

## Applications

- Suitable to factory, airports, power plants, warehouses, all industrial applications

## Product features

- Excellent structural- High strength Aluminum extruded housing can resist impact and corrosion.
- Reliable LED chips- Using the international brand LED chip, high luminous efficiency, good color, light a small decline, low energy consumption
- Perfect integrative heat sink - The sink insures good performance of LED lamp.
- Good protection -It has good waterproof and dustproof performance and can be used in bad environment.
- Easy maintenance - LED modular design offers a simple maintenance.
- Warranty: 5 years


## Technical data

Compliance	CE
IP Class	IP66
Ambient temperature	-40°C~45°C
Material	Aluminum extruded housing
Input voltage	AC100-240V, 50/60Hz
Cable entry	without cable gland, pre-wiring


## Ordering logic

ECH-FDL06	-120W	-30	-12
Product group	Power	Color temperature	Polar curve
ECH-FDL06	40W,50W,60W, 80W, 120W, 150W, 180W,240W, 300W,360W, 420W, 480W, 600W,720W, 840W, 960W	30=3000K 40=4000K 50=5000K 57=5700K	12° 25° 40° 60° 90° 110°

## Dimension

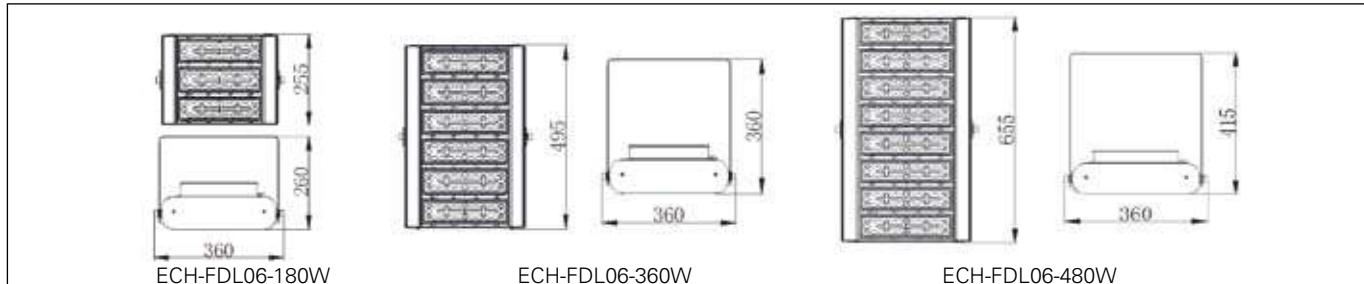

## Polar curve

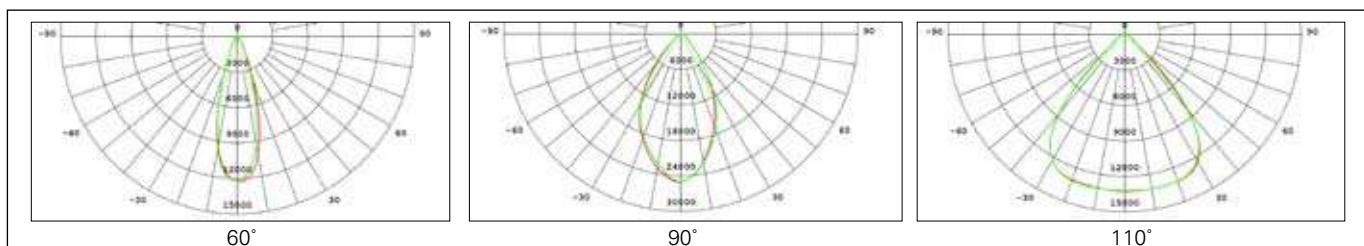

\*please mark if you need strong corrosion-resistant version.