

ECH-STL LED street light

Product introduction

ECH-STL can resist impact and corrosion with die casting aluminum housing. Street light housing is a shelter for LED module to prevent dust. It has independent heat sink and light distribution system in each LED module.



Product features

- Single or multiple LED module arrays at your options, to provide more wattage.
- LED modular design offers a simple maintenance.
- Warranty: 5 years


Technical data

Compliance	CE
IP class	IP66
Ambient temperature	-40°C~45°C
Standard material	Die casting aluminum housing
Input voltage	AC100-277V, 50/60Hz
Pole entry	48-60mm

Ordering logic

ECH-STL	-120W	-WT	-T1
Product group	Power	Color temperature	Porlar curve
ECH-STL	50W	WT=3000K, >90lm/W	T1=Type I
	60W	MT=4000K, >110lm/W	T2=Type II
	100W	CT=5700K, >110lm/W	T3=Type III
	120W		
	150W		
	180W		
	200W		
	240W		
	250W		
	300W		
	360W		

Dimension

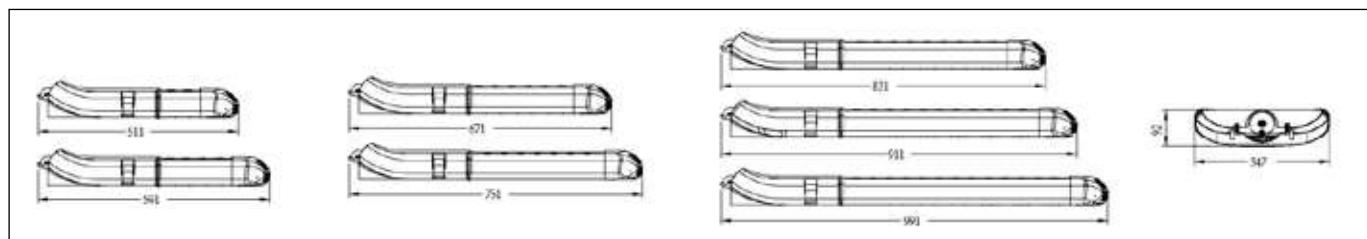

Polar curve

