

Surface LED Luminaire – MSSL

Product Introduction

Housing

Galvanized Steel, with RAL9016 white powder coated, optional SS316L

Application Area

IP66/67, for engine room, galley or other various applications

Diffuser

Clear PC

Mounting

Surface mounting

Electric

Electronic ballast
110~240V, 50/60Hz

Entries

Two entry holes on each end.

Light Source


LED 2x10W 2x1400lm
LED 2x20W 2x2800lm

Terminal Block

6 pole 6mm² max

Ambient Temp


-30 °C~+50 °C

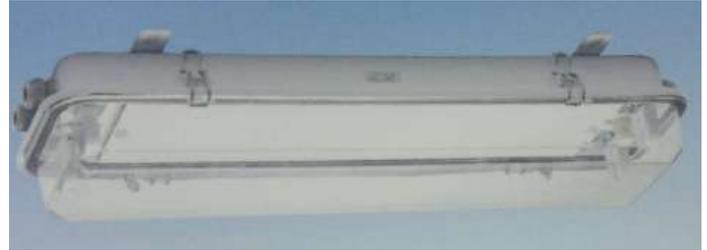

Ordering Information

MSSL	-00	-210	-EM	-20
	00-Galvanized Steel	210-2x10W	EM-1.5hrs Backup Battery	20-Cable Entry Ø20.5
	16-Stainless Steel 316L	220-2x20W	EM3-3hrs Backup Battery	25-Cable Entry Ø25.5

Dimensions

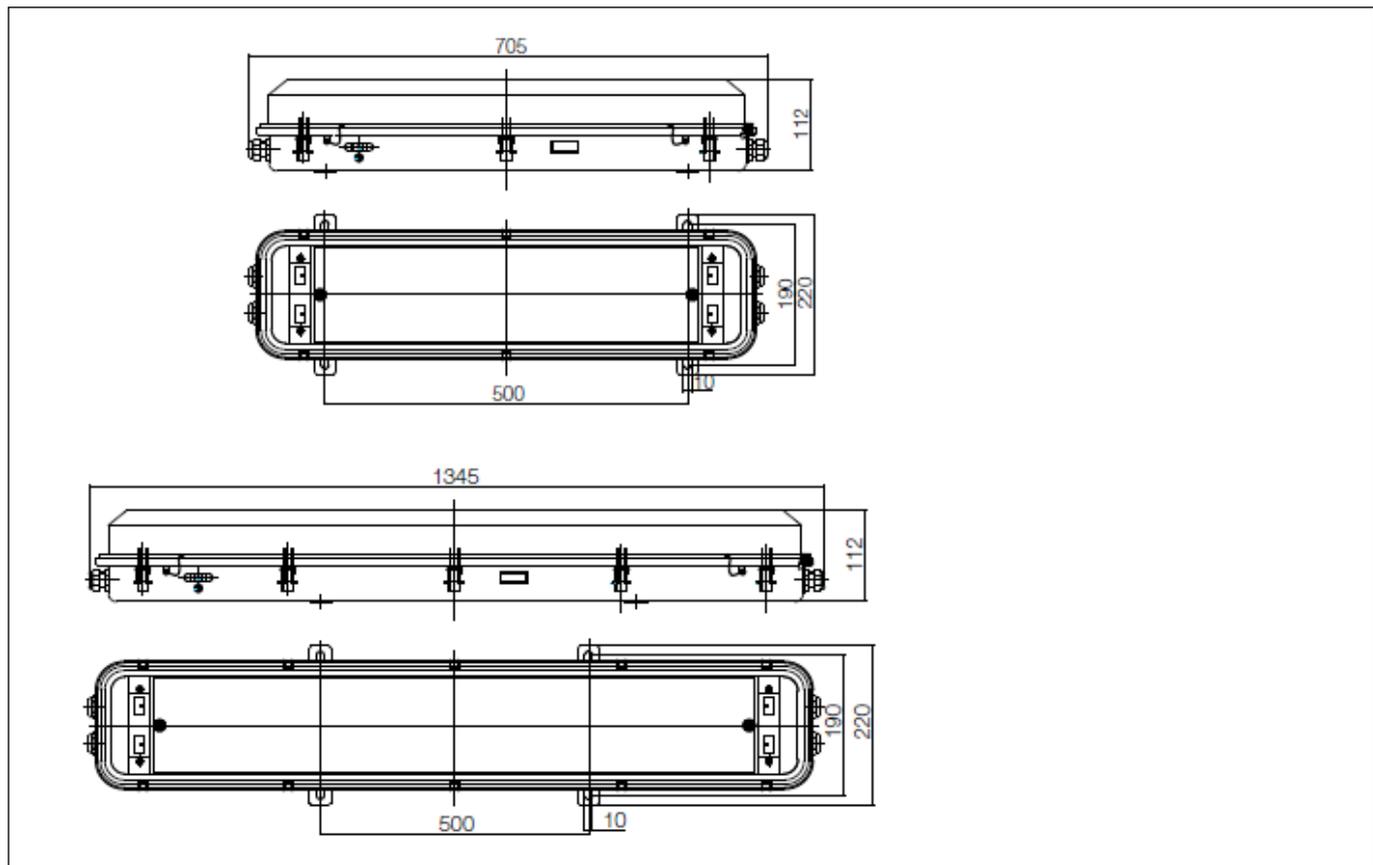

Surface LED Luminaire – MSL

Polar Curves

