

WDP Series Weather-Proof Linear Lighting

Product features

Waterproof and Dustproof

- IP65
- A whole of circle with expanding foam process to avoid to penetration
- Designed with a safety locking on plastic buckle, more reliable
- Use waterproof cable gland







Corrosion resistance

- WF2 corrosion free
- Strong corrosion resistance with PC material

Other features

- Soft glow
- Easy to install
- Electric ballast or LED Driver
- 220-240V AC 50/60Hz
- Diffusion material PC
- Housing material PC
- Insulation Class I
- Warranty: 3 years

The product is widely used in indoor and outdoor public areas, warehouse, parks, and for the plant due to dust and moist areas etc.

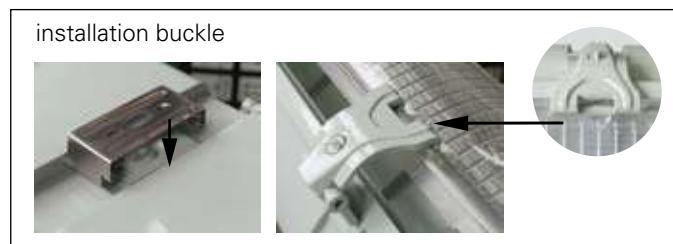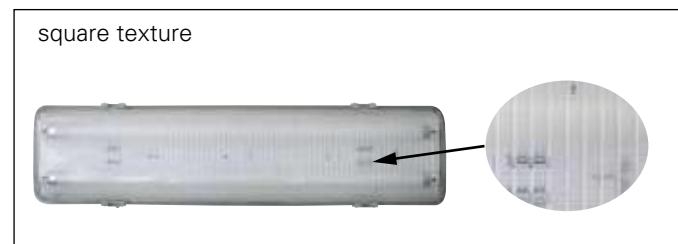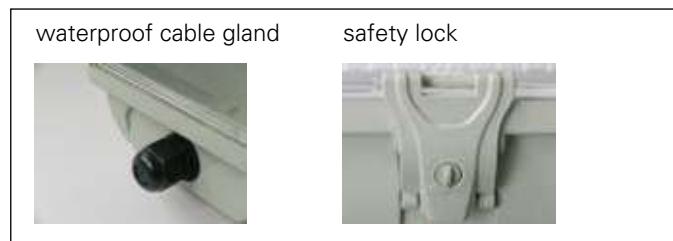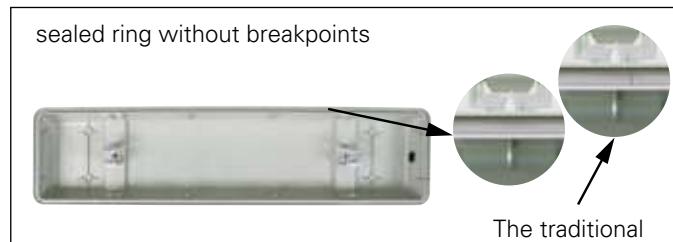

How to understand product description


WDP	-218	-T8	-EM	TW
Product Group	Power	Lamp or Color Temperature	Emergency	Through wiring
WDP	-118:1x18W	Lamp For Fluorescent	EM1: 1.5H	Default=without
WDP-LED	-218:2x18W	-T8	EM2: 3H	Through wiring
	-136:1x36W	Color Temperature for LED		TW=with through
	-236:2x36W	-30:3000K		wiring
	-26:26W(For LED)	-40:4000K		
	-50:50W(For LED)	-50:5000K		
		-57:5700K		

WDP Series Weather-Proof Linear Lighting


Ordering information

Description	Power	Cable	A (mm)	B (mm)	C (mm)	L (MM)	Weight (Kg)	Clip
WDP218-T8	2X18W	PG13.5	658	158	101	400	1.57	4
WDP236-T8	2X36W	PG13.5	1268	158	101	900	3.07	8
WDP-LED-26W	26W	PG13.5	658	158	101	400	1.57	4
WDP-LED-50W	50W	PG13.5	1268	158	101	900	3.07	8

Dimension

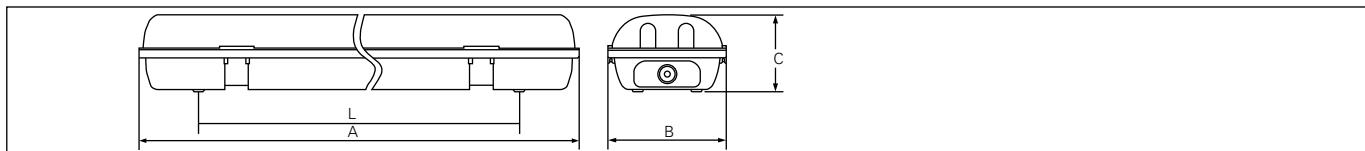

Polar curve

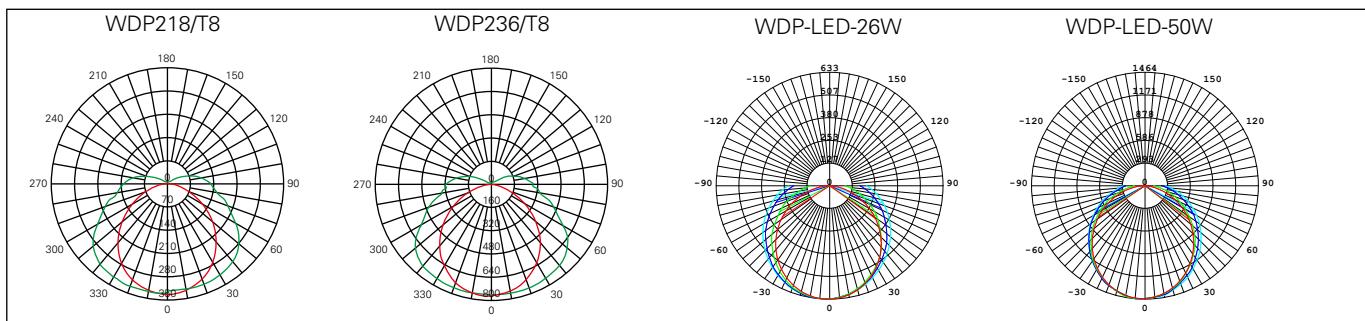

Mounting pattern

